


PROOF OF PERFORMANCE

Rotary Steerable System

FEBRUARY 2014

OBJECTIVE

Drill 8000' vertical section of 8 3/4" hole with a build and hold to 5 degrees in one continuous run

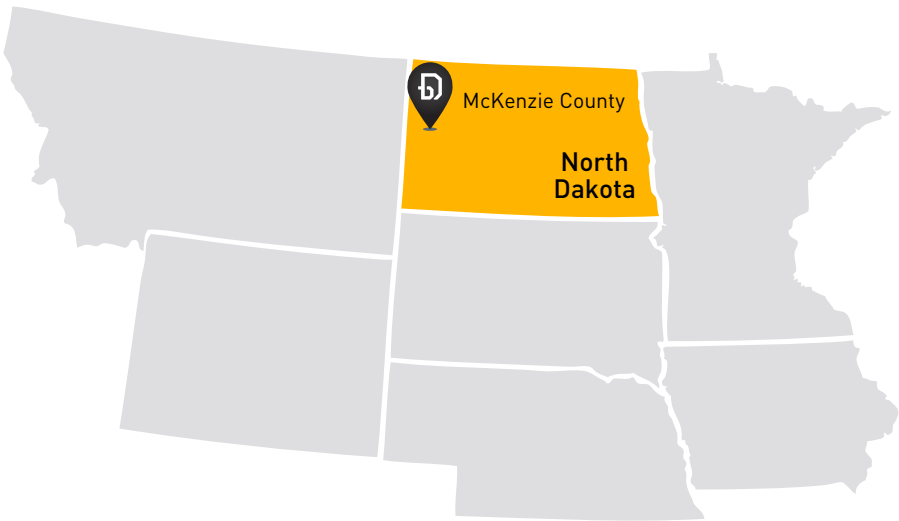

CHALLENGE

- The salt formations cause swelling which leads to potential stuck pipe.
- Minimize trips to reduce risk of wellbore instability.

DoubleBarrel RSS successfully drilled the full section from 2,239' to 10,668' with a single tool despite a bit trip. With an optimal BHA along with 100% downlinking success, the operator was able to maintain an average ROP of 70 ft/hr throughout the entire section. DoubleBarrel eliminated any RSS related trips.

RESULTS